

Con la compra de **20 PLACAS**
soporte **SIN CARGO**

Sijaton
Suministros industriales





2 mm _____ **13,50 €**

3 mm _____ **15,50 €**

4 mm _____ **17,50 €**

5 mm _____ **20,50 €**


6 mm _____ **22,50 €**

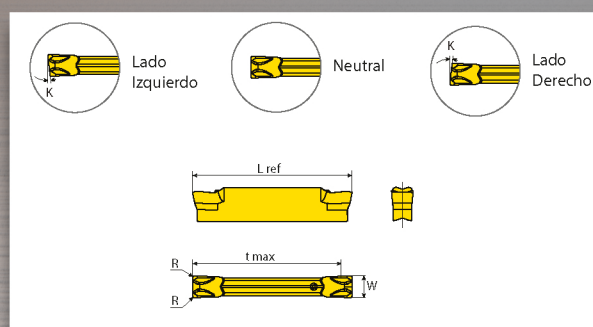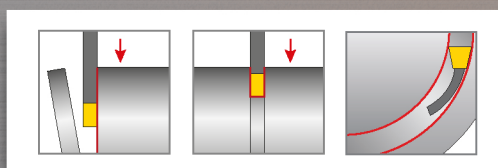


	Tamaño de bolsillo	Referencia	Dimensiones mm					Rango de alimentación (mm/rev)	Grado		
			W ± 0.04	R	t max	K°	L ref		VPG	VMG	VKG
Filo de corte para piezas pequeñas, tubos de pared delgada y materiales blandos GF	2	VGD2.00-020-GF	2.00	0.20	20.0	0.0	22.0	0.03 - 0.10	●	●	○
	2	VGD2.00-015-6R-GF	2.00	0.15	20.0	6.0	22.0	0.03 - 0.10	●	○	○
	2	VGD2.00-015-6L-GF	2.00	0.15	20.0	6.0	22.0	0.03 - 0.10	●	○	○
	2	VGD2.00-020-15R-GF	2.00	0.20	20.0	15.0	22.0	0.03 - 0.08	●	○	○
	2	VGD2.00-020-15L-GF	2.00	0.20	20.0	15.0	22.0	0.03 - 0.08	●	○	○
Filo de corte afilado, para una alimentación y velocidad baja GM	3	VGD3.00-030-GM	3.00	0.30	20.0	0.0	22.0	0.08 - 0.22	●	●	●
	3	VGD3.00-020-6R-GM	3.00	0.20	20.0	6.0	22.0	0.05 - 0.16	○	●	○
	3	VGD3.00-020-6L-GM	3.00	0.20	20.0	6.0	22.0	0.05 - 0.16	○	●	○
	4	VGD4.00-040-GM	4.00	0.40	23.0	0.0	25.0	0.08 - 0.25	●	●	○
Polivalente geométrico, para uso general GT	2	VGD2.00-020-GT	2.00	0.20	20.0	0.0	22.0	0.03 - 0.12	●	○	●
	3	VGD3.00-030-GT	3.00	0.30	20.0	0.0	22.0	0.05 - 0.15	●	○	●
	4	VGD4.00-020-GT	4.00	0.20	23.0	0.0	23.0	0.05-0.15	○	○	○
	4	VGD4.00-040-GT	4.00	0.40	23.0	0.0	25.0	0.05 - 0.18	●	○	●
	5	VGD5.00-040-GT	5.00	0.40	23.0	0.0	25.0	0.08 - 0.25	●	○	●
	6	VGD6.00-040-GT	6.00	0.40	23.0	0.0	25.0	0.10 - 0.25	●	○	●
Geometría redonda polivalente para perfilado y subperfilado GR	2	VGD2.00-100-GR	2.00	1.00	18.0	0.0	22.0	0.03 - 0.12	●	○	○
	3	VGD3.00-150-GR	3.00	1.50	18.0	0.0	22.0	0.05 - 0.15	●	○	○
	4	VGD4.00-200-GR	4.00	2.00	20.0	0.0	25.0	0.05 - 0.18	●	○	○

Promoción válida hasta fin de existencias. Precios sin IVA.

Referencia		Dimensiones mm							
RH/LH	PW	t max	HXB	H1	F	L1	L2	a	H2
VGER/L1616-2T12	2	12	16X16	16	15.3	125	35	1.4	4.0
VGER/L2020-2T12			20X20	20	19.3	125	35	1.4	—
VGER/L1212-3T12	3	12	12X12	12	10.8	125	35	2.4	4.0
VGER/L1616-3T12			16X16	16	14.8	125	35	2.4	4.0
VGER/L2020-3T12			20X20	20	18.8	125	35	2.4	—
VGER/L2525-3T12		21	25X25	25	23.8	125	35	2.4	—
VGER/L1616-3T21			16X16	16	14.8	125	35	2.4	4.0
VGER/L2020-3T21			20X20	20	18.8	125	35	2.4	—
VGER/L2525-3T21	4	12	25X25	25	23.8	125	35	2.4	—
VGER/L2525-4T12			25X25	25	23.5	125	35	3.0	—
VGER/L1616-4T21			16X16	16	14.5	125	35	3.0	4.0
VGER/L2020-4T21		21	20X20	20	18.5	125	35	3.0	—
VGER/L2525-4T21			25X25	25	23.5	125	35	3.0	—
VGER/L2525-5T22*			25X25	25	23.0	150	43	4.0	—
VGER/L3232-5T22*	5	22	32X32	32	30.0	170	43	4.0	—
VGER/L2525-6T24*	6	24	25X25	25	22.5	150	45	5.0	—
VGER/L3232-6T24*			32X32	32	29.5	170	45	5.0	—

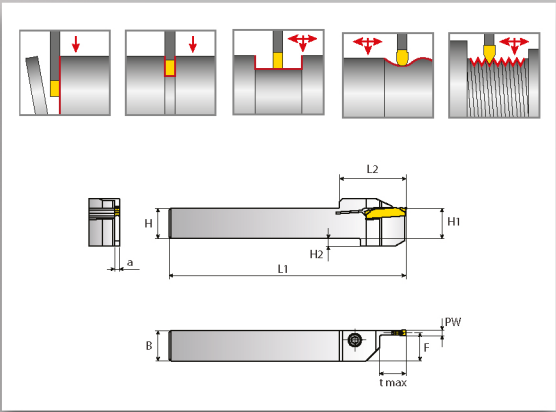

Referencia		Dimensiones mm						
RH/LH	PW	D max	HXB	H1	F	L1	L2	a
VGER/L1212-2T12PH	2	26	12X12	12	11.3	125	22	1.4
VGER/L1616-2T12PH		26	16X16	16	15.3	125	22	1.4
VGER/L2020-2T12PH		26	20X20	20	19.3	125	22	1.4
VGER/L2525-2T12PH		42	25X25	25	24.3	125	30	1.4
VGER/L1616-3T12PH	3	26	16X16	16	14.8	125	22	2.4
VGER/L2020-3T12PH		42	20X20	20	18.8	125	30	2.4
VGER/L2525-3T12PH		42	25X25	25	23.8	125	30	2.4

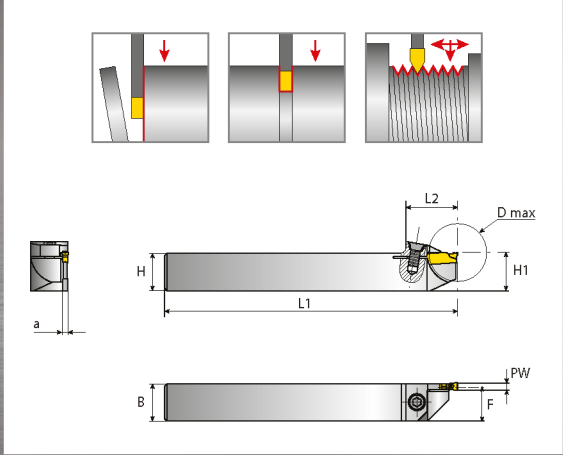

Referencia		Dimensiones mm / inch				
	B	PW	D max*	H1	L1	a
VGP26-2D	26 / 1.024	2 / .079	50 / 1.969	21.4 / .843	110 / 4.331	1.4 / .055
VGP26-3D	26 / 1.024	3 / .118	70 / 2.756	21.4 / .843	110 / 4.331	2.4 / .094
VGP32-3D	32 / 1.260		100 / 3.937	24.8 / .976	150 / 5.906	2.4 / .094
VGP35-3S	35 / 1.378	4 / .157	100 / 3.937	33.5 / 1.319	150 / 5.906	2.4 / .094
VGP32-4D	32 / 1.260		100 / 3.937	24.8 / .976	150 / 5.906	3.0 / .118
VGP32-5D	32 / 1.260		100 / 3.937	24.8 / .976	150 / 5.906	4.0 / .157
VGP32-6D	32 / 1.260	6 / .236	100 / 3.937	24.8 / .976	150 / 5.906	5.0 / .197

